



XY-215S

XY Series

Dual 15-inch quasi-bandpass subwoofer

A versatile PA/monitor speaker series that is compact in size and perfect for near-field monitoring - yet can deliver high-quality sound to the corners of the room.

KEY FEATURES


- A quasi-bandpass subwoofer with two 15-inch LF drivers.
- High-response deep bass as low as 42 Hz is delivered to reproduce a tight and punchy kick.
- Two drivers efficiently generate air vibration to boost radiation efficiency.
- Requires an active crossover to set the necessary frequency range (presets can be provided from Pioneer for combinations using the Pioneer XY-152, XY-122, XY-101 and XY-81).
- NL4 INPUT and LINK OUT connections as standard.
- Robust enclosure made from premium multi-laminate birch plywood.

SPECIFICATIONS

Enclosure type	Dual driver, quasi-bandpass subwoofer
Frequency response	42 Hz to 160 Hz
Sensitivity (1 W/1 m)	102 dB (half space)
Nominal Impedance	4 Ω
Power Handling	800 W RMS, 1600 W Program
Maximum SPL	131 dB cont., 137 dB peak (half space)
Driver Configuration	2 × 15 inch (381 mm) LF cone drivers
Connectors	2 × Neutrik SpeakON™ NL4
Dimensions (W × H × D)	831 mm × 526 mm × 700 mm (32.7 inch × 20.7 inch × 27.6 inch)
Weight	71 kg (156.6 lbs)
Rigging and Hardware	4 × flush handles, 2 × M20 polemount sockets for mid/high enclosures, 8 × rubber feet (bottom and left) and 4 × mating recesses (top), 16 × M8 holes with pre-inserted bolts for 4 × castors on rear
Grille	Hex punched steel
Enclosure	18 mm (0.7 inch) birch plywood
Finish	Impact-resistant, Black semi-matt textured
Suggested Power Amplifier	Recommended : K3DSP Minimum : K2DSP
Accessories	2 × polemount socket cover (-W model only)

XY-215S

TECHNICAL DRAWING

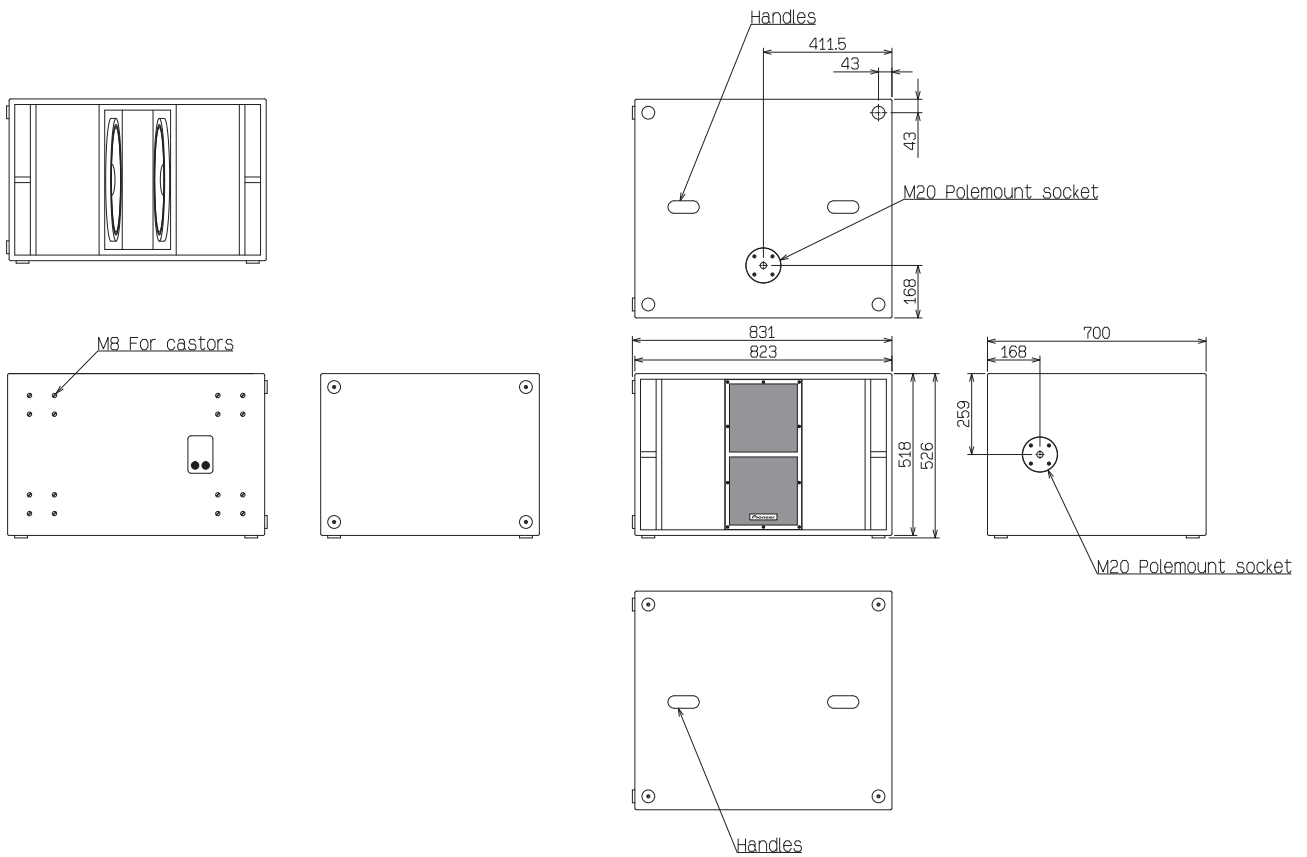

APPLICATION

Clubs / Bars / Hotels / Touring

ACCESSORIES



CP-XYCS1



XY-215S-W